Rittling Cabinet Convector Submittal Data
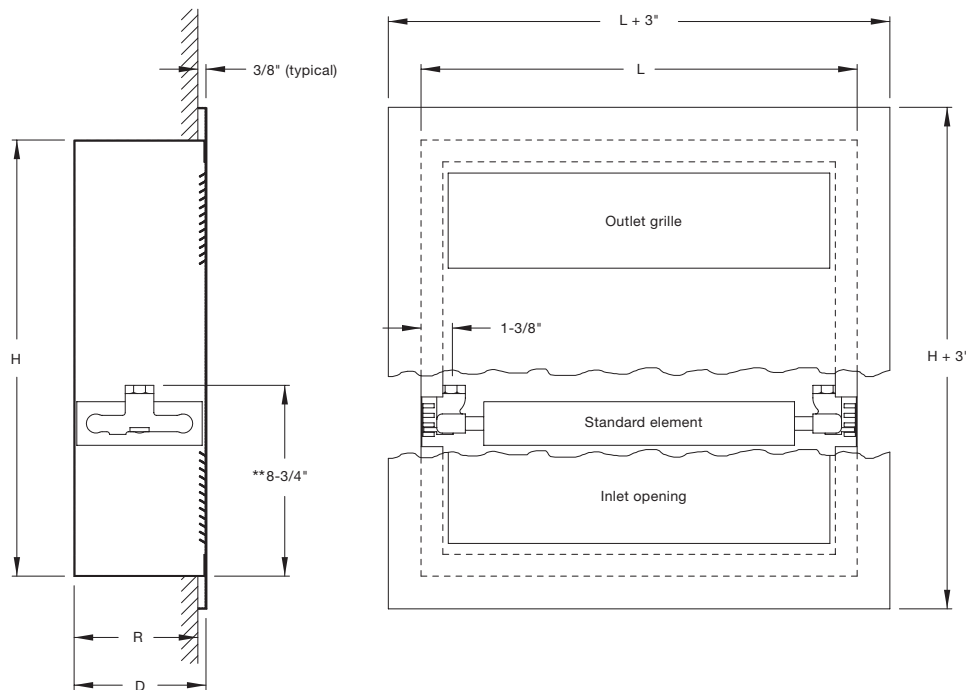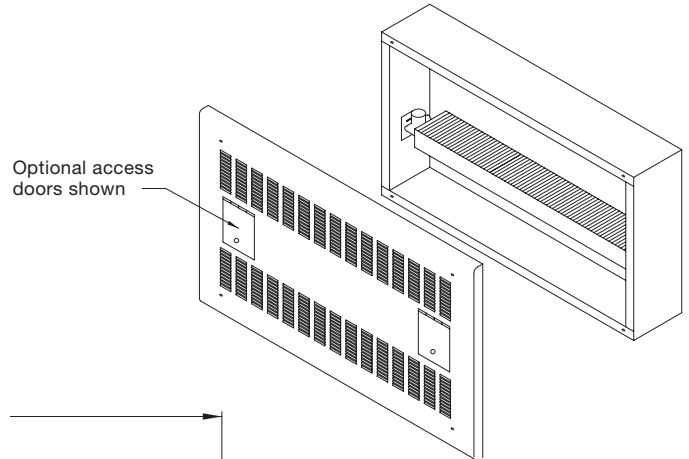
Dimensions and data: Model PL

Fully recessed wall

Nominal lengths (L)	Nominal heights (H)	Nominal depths (D)	Maximum dimension (R)
24"	18"	4"	3-3/4"
28"	20"	6"	5-3/4"
36"	26"	8"	7-5/8"
40"	32"		
48"			
52"			
60"			
64"			

Any combination of length, height and depth is available.

Optional access doors shown

PL Convector Access Door Location Availability

Unit Height	Unit Lengths	# of Doors **Available	Available Locations	Door Size
Less than 18"	All Lengths	0	No access door locations available	
18" to 19"	Less than 32"	1	3, 4, 5, 6	4"H x 5"W
18" to 19"	Less than 32"	2	3, 5 or 4, 6	4"H x 5"W
18" to 19"	32" and longer	4	3, 4, 5, 6	4"H x 5"W
20" to 25"	Less than 32"	1	1, 2, 3, 4, 5, 6	4"H x 5"W
20" to 25"	Less than 32"	2	1, 2 or 3, 5 or 4, 6	4"H x 5"W
20" to 25"	32" and longer	4	3, 4, 5, 6	5"H x 5"W
26" and over	Less than 32"	2	1, 2 or 3, 5 or 4, 6	5"H x 5"W
26" and over	Less than 32"	4	1, 2, 3, 5 or 1, 2, 4, 6	5"H x 5"W
26" and over	32" and longer	6	1, 2, 3, 4, 5, 6	5"H x 5"W

Standard Convector Access Door Locations

Note:
- Access doors not available in locations 5 and 6 with arched inlet.
- *Contact factory on heights less than 20"
- For convectors less than 28" long, end pockets are not offered as standard. Consult factory for availability.
- **The coil is adjustable 7/8" up in 7/16" increments.