





## Disconnect switches

 120/208/230/277V, 20A


### Features

- Ratings up to 20A, 277V ac
- High in-rush (ON-OFF types)
- Positive switch action
- Distinctive styling
- Non-illuminated
- Double pole
- Panel cut out: 30.1 x 22.2mm

Terminal	Function	Rocker
 <p>6.3 x 0.8</p>	<p>ON OFF switches - ON when pressed over terminals 3 &amp; 6</p>  <p>ON - OFF </p>	<p>Matt</p> 

### Integral splash resistance

Current carrying parts are protected from moisture. Droplets which may enter the switch are channelled out through ports in the switch body.



### Specifications

- European 16(4)A 250Vac T125, 10A 400Vac T125
- UL CSA 20A 277Vac, 250Vac 1½ hp, 125Vac 1hp
- UL 100°C, file E45221, CSA file LR10990
- Independently verified to ISO22196:2007
- 3mm contact gap with positive break switching



### Finish

- Matt is standard


### Color

- Black

### Legend printing

- White

### Dimensions (mm)

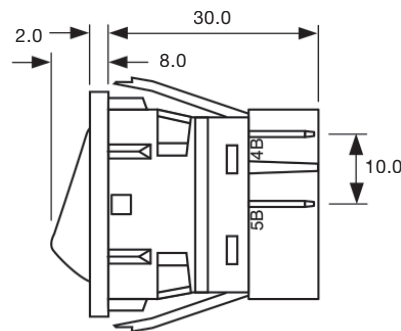


Panel cut-out

### Panel thickness

0.75 to 3.0mm

Terminal spacing - Poles 10.5 between centers



Bezel

