

# Cabinet Unit Heater Submittal Data






## Disconnect switches

 120/208/230/277v

### Features

- Rated at 20A, 277V ac
- Positive switch action
- Distinctive styling
- Illuminated & non-illuminated
- Double pole
- DC LED Illumination Available
- Panel cut out: 30.1 x 22.2mm

Terminal	Function	Rocker
 <p>6.3 x 0.8</p>	 <p>ON - OFF</p>	<p>Softline Matt</p> 

### Integral Splash Resistance

Current carrying parts are protected from moisture. Droplets which may enter the switch are channelled out through ports in the switch body.



### Specifications

- European 16(4)A 250Vac T125, 10A 400Vac T125
- UL CSA (except 6054 & 6055 Switches) 20A 277Vac, 250Vac 11/2hp, 125Vac 1hp
- UL 100°C, file E45221, CSA file LR10990
- 3mm contact gap with Positive Break switching.



### Features

- Matte is standard

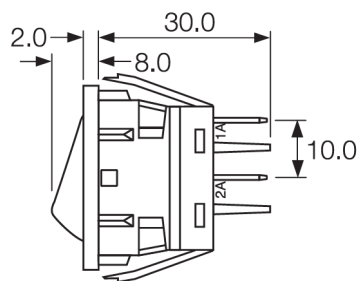
### Color

- Black

### Legend printing

- White

### Dimensions (mm)



Panel cut-out \*\* Bezel

### Panel thickness

L 0.75 to 2.5mm

Terminal spacing - Poles 10.5 between centres

