


# Ball valve, Y-strainer, union end

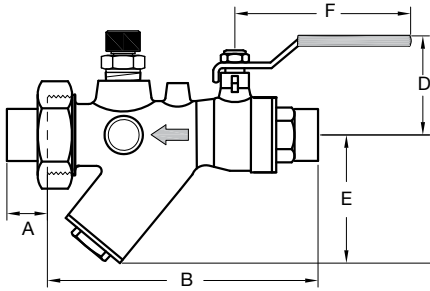

## Design data

- Hot forged brass body
- O-ring seals
- 600 WOG
- 325 °F
- Interchangeable union end
- Blowout-proof shafts
- Double shaft seals
- Removable filter screen

## Pressure/temperature test plug

- 325 °F
- 400 PSIG
- 1/4" MNPT
- Side discharge



## Dimensions (inches)

Size	A	B	D	E	F	Filter area (sq. in.)	C <sub>v</sub>	Weight (lbs.)
1/2	0.59	4.1	1.7	1.6	1.9	2.7	5.5	1.1
3/4		4.2						

## Materials

<b>Body</b>	Forged brass ASTM B283
<b>Handle and nut</b>	Zinc plated
<b>Ball</b>	Hard chrome plated
<b>Ball seals</b>	Teflon
<b>Shaft seals</b>	Dual Viton o-rings
<b>Union seals</b>	Viton o-ring
<b>Cap seal</b>	Viton o-ring
<b>Filter screen</b>	20 mesh, 304 stainless steel
<b>Tail pieces, nut</b>	Brass

## Valve seat rating

