

Stainless steel corrugated hoses



Carboline Radiant Ceiling Panels

DN10 - 10 mm PTC x 10 mm PTC

Number of hoses _____

DN10 - 10 mm PTC x 1/2" NPT

Number of hoses _____

DN12 - 10 mm PTC x 10 mm PTC

Number of hoses _____

DN12 - 10 mm PTC x 1/2" NPT

Number of hoses _____

**1/2" Thermoplastic with bonded stainless steel
braid - 10 mm PTC x 10 mm PTC**


Number of hoses _____

**1/2" Thermoplastic with bonded stainless steel
braid - 10 mm PTC x 1/2" NPT**

Number of hoses _____

Type	Dia.	Length	Bend radius static	Maximum operating pressure	Maximum operating temperature
Stainless steel	DN10	30"	0.7"	145 PSI	185 °F
	DN12	30"	0.8"	145 PSI	185 °F
Braided*	1/2"	30"	2.5"	145 PSI	185 °F

* UL94 VO fire rated

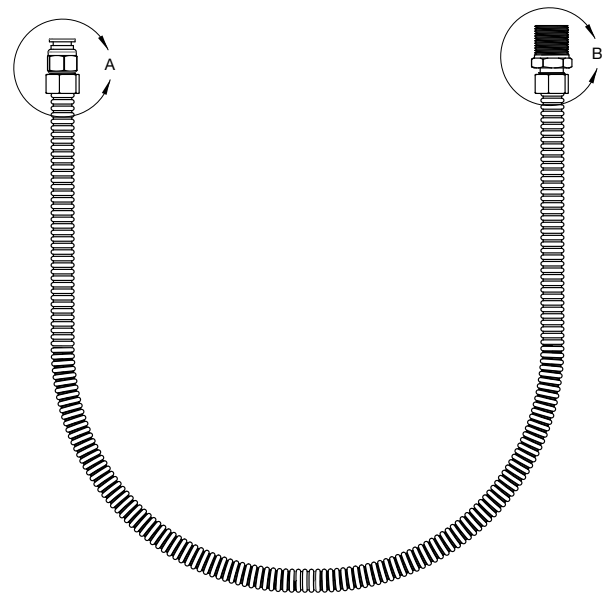

Detail A



10mm push fitting brass material connects to panel

Detail B



1/2" NPT fitting brass material connects to supply/return